


AMBICLIP SYSTEM

SCREEDED FLOOR CONSTRUCTION

ambiente®

more than underfloor

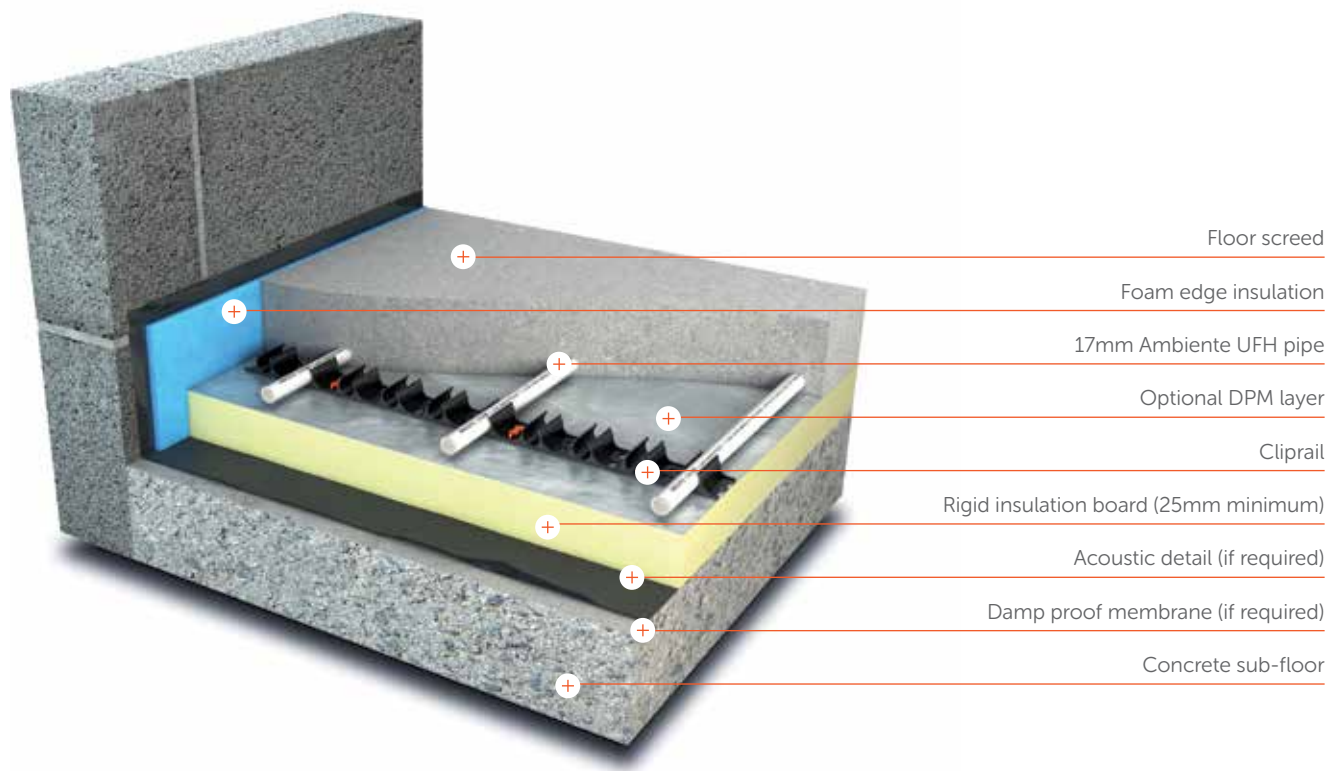

PRODUCT OVERVIEW

The cliprail system is one of the most common underfloor heating systems providing a quick, flexible and effective form of heating within a screeded floor buildup.

Edge and floor insulation is installed over the subfloor on to which cliprails are then fixed to by both the adhesive backing strip and barbed staples (where insulation is not supplied, checks should be made to ensure that the insulation is compatible with the cliprail system). Once the cliprails are secured in position, the underfloor heating pipework is laid in continuous loops and clipped down in accordance with the underfloor heating design drawings. Once complete, the system is pressure tested and witnessed to finalise the installation.

We recommend that the screeding process is scheduled to follow shortly after installation to avoid leaving the system vulnerable to damage. If a liquid screed is being used, the insulation must first be sealed to provide a watertight base.

10004A|0415-003